

Luxe
déférence de LALOO



STORAGE SOLUTIONS

COUPE SWIVEL TOWER L53CPT


Specification and Installation Instructions (page 1 of 4)

The four shelf swivel tower is a unique storage solution for bathrooms or walk-in closets.

The tower is suspended at a height of your choosing and swivels 360° between a full length mirror and open shelves with chrome accent railings.

Coupe Tower

L53CPT

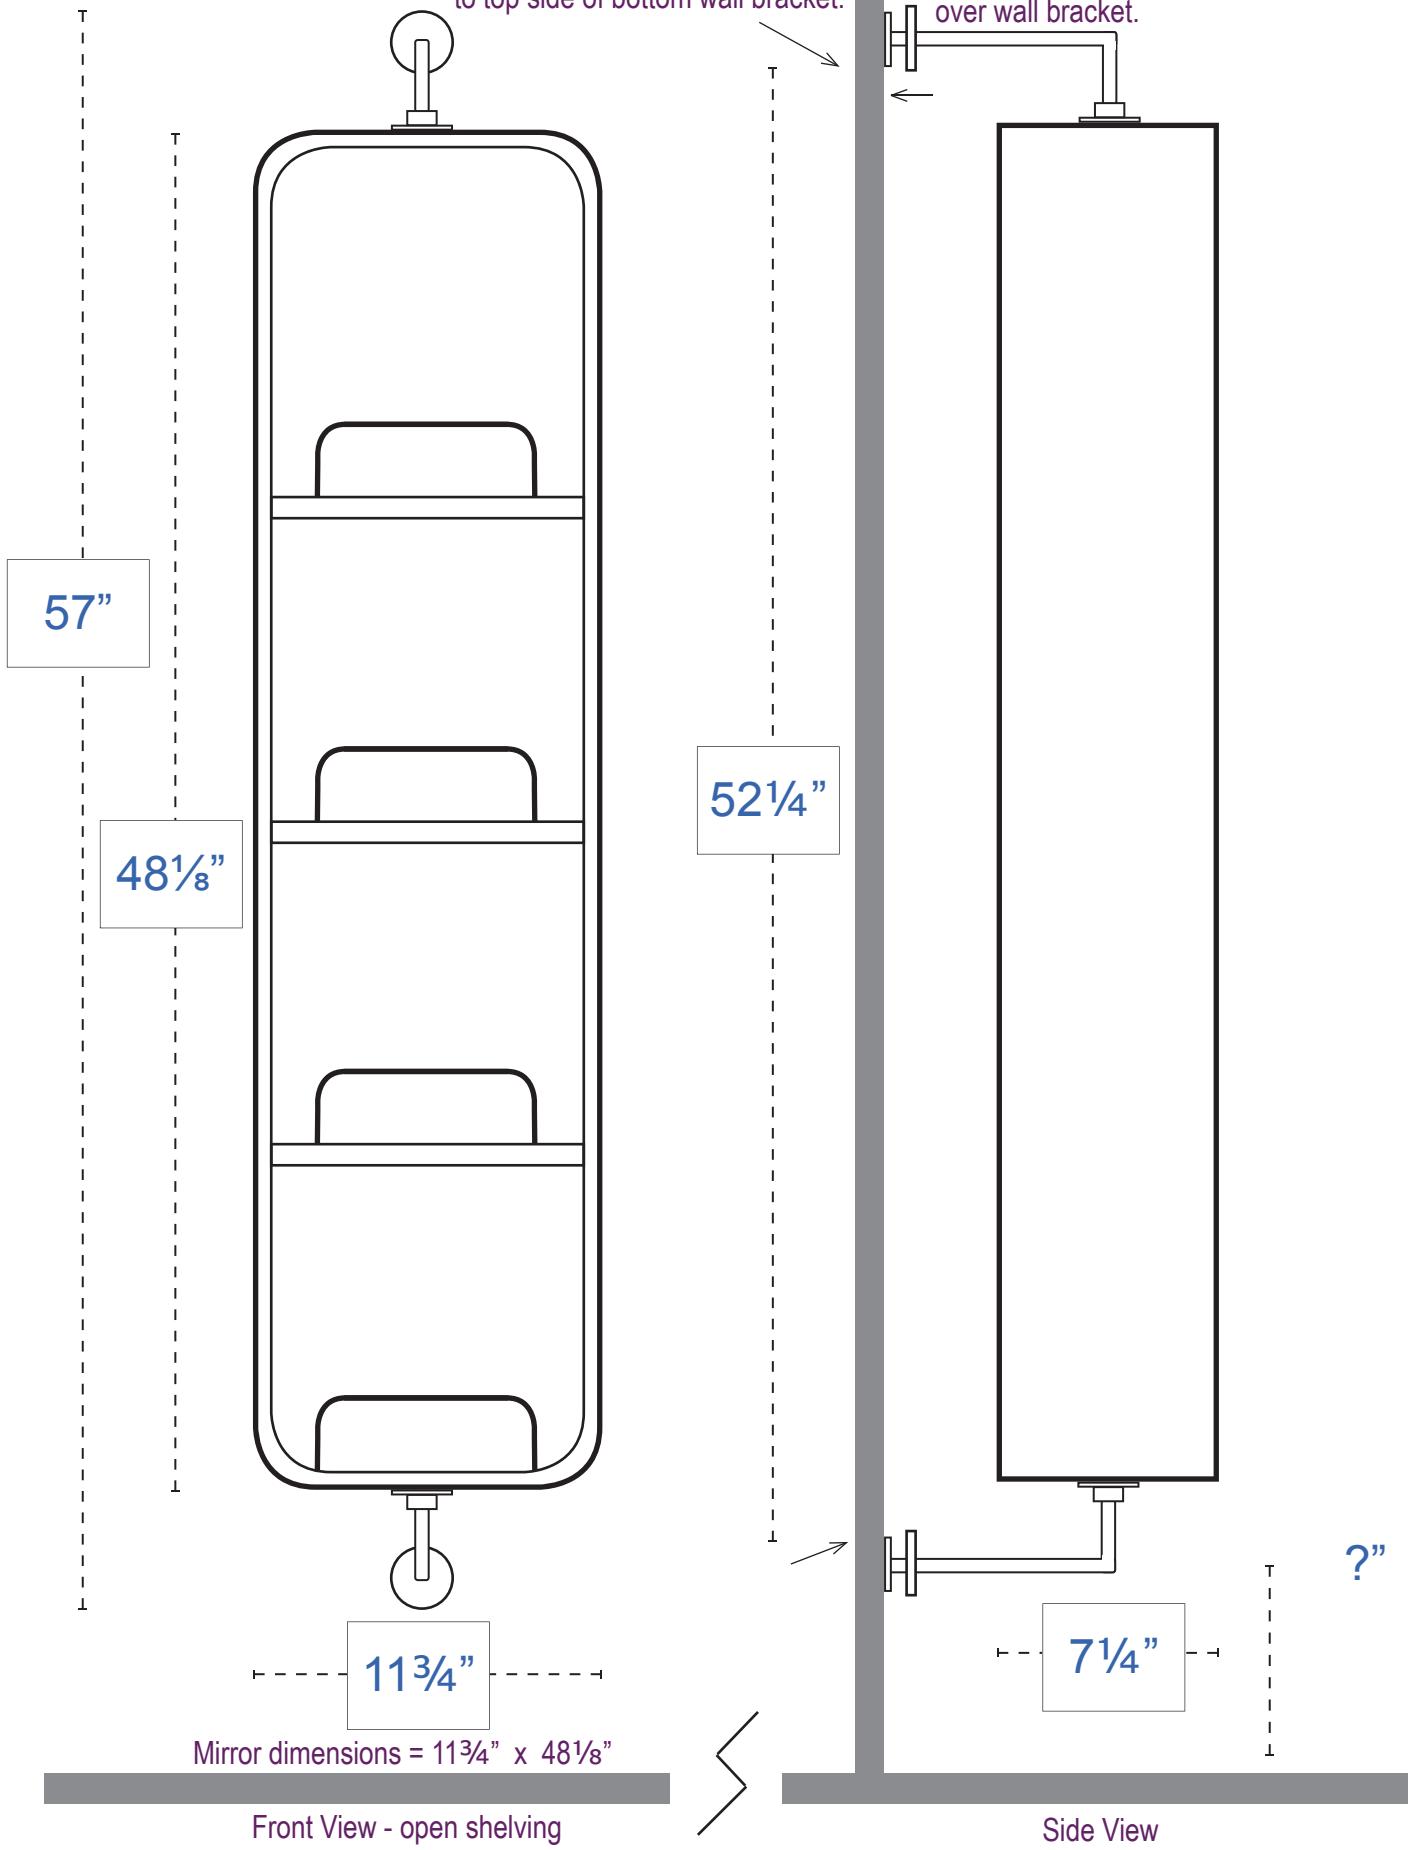

Coupe Swivel Tower

L53CPT


1. Establish the top and bottom of the cabinet noting the position of the cabinet shelf railings as pictured.
2. Separate Bottom cabinet flange from wall elbow/bracket.
3. Install Bottom cabinet flange on underside of cabinet; aligning the holes in the flange with the marked dimples on the cabinet.



4. Loosen the set screw on the end of the top hardware and separate the Above flange from the wall elbow/bracket.
5. Install the Above Flange on the top of the cabinet; aligning the holes in the flange with the marked dimples on the cabinet.
6. Attach the upper Elbow/flange to the Above flange and tighten the set screw into the channel.

7. Establish the height of the cabinet. The distance from the floor to the underside of the lower flange is discretionary. The overall height of the cabinet including the mounting brackets is 57".

8. ***The cabinet must be installed to stud or to backing that is braced between studs.***

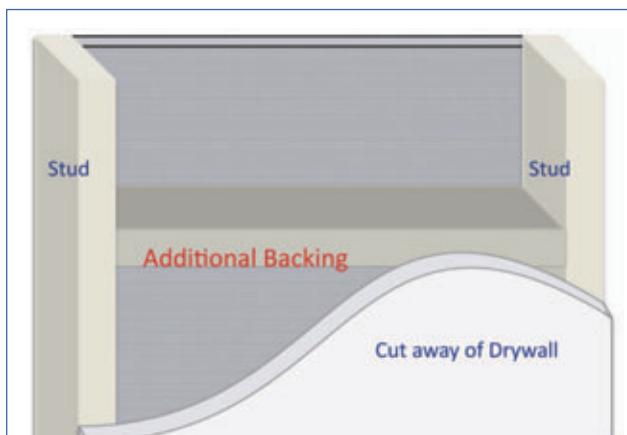

9. Install the Bottom Elbow/Flange to the wall.

10. Pencil at plumb line to the Top Wall Flange. The distance from the top edge of the Bottom Wall Flange to the underside of the Top Wall Flange is $52\frac{1}{4}$ ".

11. The assistance of a second person will be beneficial when dry fitting the top flange to the wall.

12. Rest the cabinet on the pivot point of the Bottom Elbow/Flange and align the the Top Wall flange with the markings on the wall.




13. Screw the Top Wall Flange to the wall.



14. Slide the decorative covers over the wall flanges. (both bottom and top)



15. Adjust the tension on the set screw to allow for smooth rotation of the tower.

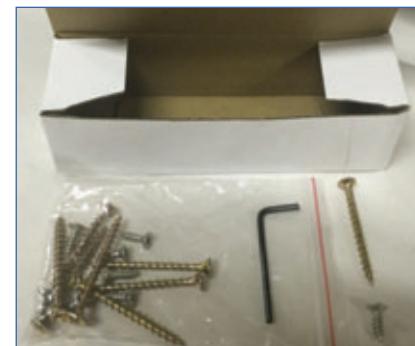

Contents:

1 x Allen Key
8 x Long Screws
8 x Short Screws